


Fire shield – 60 - 15

Fire Barrier EN Tested– Product Datasheet

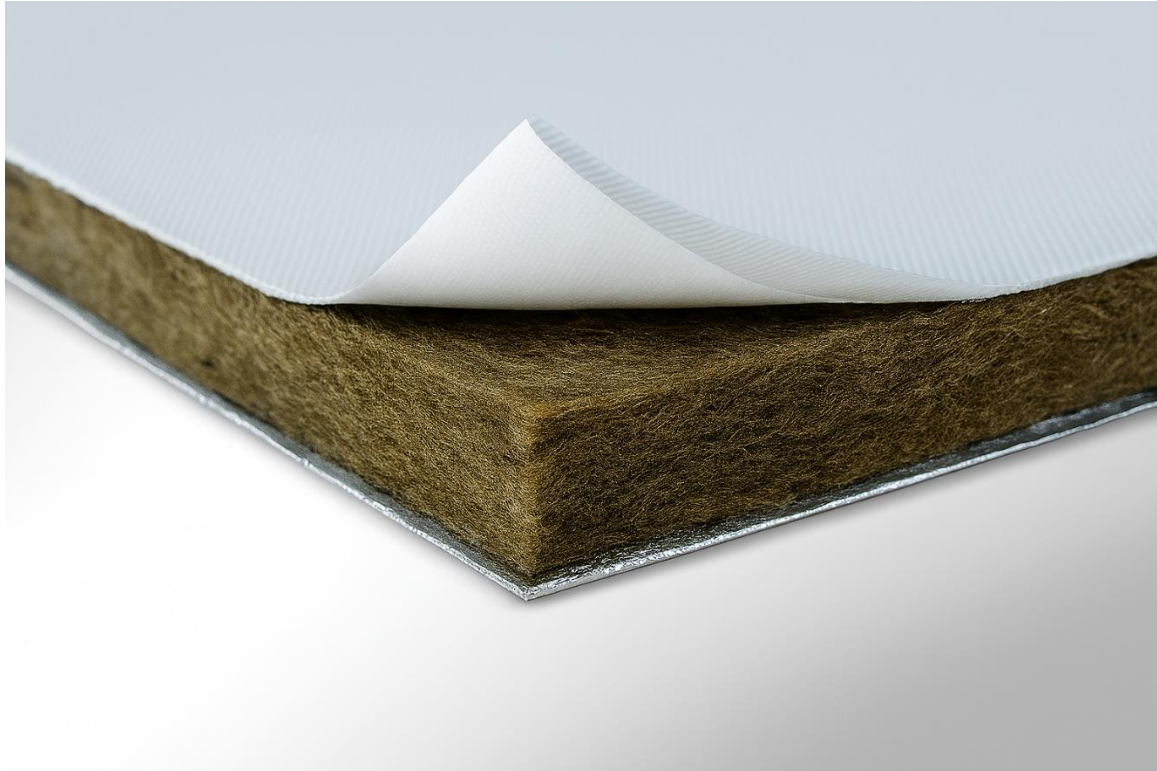

Fire Shield 60 Data Sheet

Description:

Stone Shield 60 is a super-lightweight, flexible fire curtain designed to provide **60 minutes integrity (E 60)** with **no thermal insulation (I 15)** when tested to **EN 1364-1:2015** (non-loadbearing walls). It is ideal where flame and smoke containment is required without insulation.

Certification:

- **Integrity (E):** E 60 – 60 minutes at EN 1364-1:2015
- **Insulation (I):** I 15 –insulation
- **Third-party certification:** WF Report Certificate No. tbc

Key Benefits:

Fire shield – 60 - 15

Fire Barrier EN Tested– Product Datasheet

- **lightweight:** Approx. 2.65 kg/m² for ease of handling
- **Flexible Glass and Stone-fibre fabric curtain** for rapid deployment
- **Minimal storage footprint:** Rolls pack compactly
- **Easy to cut and trim** using standard tools
- **Installer-friendly:** Supplied with full illustrated fitting instructions

Applications:

- Smoke and flame barrier in ceiling voids and partition openings
- Temporary hatch and service penetration sealing
- Retrofit fire upgrades in industrial and commercial buildings
- Theatre and auditorium fire curtains where insulation not required

Construction & Materials:

Component	Material/Specification
Fabric	Woven Glass-fibre cloth, proprietary binder
Coating	High temperature - non-toxic finish
Reinforcement	None (single-layer curtain)

Dimensions & Packaging:

Property	Value
Thickness	12 mm
Roll Width	1.20 m
Roll Length	6 m
Coverage per Roll	7.2 m ²
Pack Weight	≈ 19.08 kg
Packing	Individual Plastic packing

Performance (EN 1364-1:2015):

Criterion	Classification
Integrity	E 60
Insulation	I 15

Installation Guide:

As per installation guide

Fire shield – 60 - 15

Fire Barrier EN Tested– Product Datasheet

Storage & Handling:

- Store rolls horizontally in dry, indoor conditions (5 °C–30 °C).
- Shelf life: N/A.

Health & Safety:

- Wear gloves and safety glasses when handling and cutting.
- Dust mask (EN 149 FFP2) recommended if fibre release occurs.
- Refer to MSDS for full safety guidance.

